



**223MMR400K**  
 GENERAL PURPOSE FILM  
 Parts are RoHS compliant

**ELECTRICAL SPECIFICATIONS**

Capacitance: 0.022 uF  
 Dissipation Factor: 0.01 Max at 1000 Hz and 25°C  
 Temperature Coefficient: 400 PPM/°C: -200 PPM/°C, 200 PPM/°C  
 Ripple Current: at and  
 ESR: - at - and -  
 Self Inductance: 1 Nanohenries maximum per mm of pitch  
 dvdt: 190 V/μs

Tolerance: -10 % , +10 %  
 Temperature Range: -40°C to +105°C  
 Above 85°C the rated (DC/AC) voltage must be derated at per 1.25%/2.25%/°C  
 WVDC: 400 Volts DC  
 SVDC: N/A Volts DC  
 VAC: 200 Volts AC

Terminal to Terminal Dielectric strength: 1.5 times the rated DC voltage when applied between the terminals for 60 seconds

Terminal to case Dielectric strength: 0 VAC when applied between the terminals and case for 0 seconds

Insulation Resistance (Terminal to Terminal): 9000 MINIMUM after 100 Volts DC is applied for 60 seconds at 20°C

Insulation resistance (Terminal to Case): N/A Megohms MINIMUM after 0 Volts DC is applied for 0 seconds at 0

Reliability: Load Life: 2000 hours at 85C with 125% of rated voltage

Capacitance Change: <5% of initially measured value


D.F. Change: <50% of maximum specified value

I.R. Change: >50% of minimum specified value

**PHYSICAL DIMENSIONS**

Length (L): 10.3 mm, MAX mm  
 Height (H): 7.9 mm, +/-MAX mm  
 Thickness (T): 4.8 mm, +/-MAX mm

Lead Spacing (S): 7.5 mm, +/-1 mm  
 Lead Diameter (d): 0.6 mm, +/-0.05 mm  
 Lead Length (LL): 15mm, +/- MIN mm

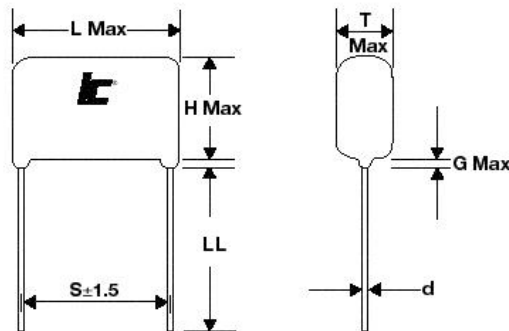

2400 East Devon Avenue Suite 292 Des Plaines, IL 60018 (847) 675-1760 FAX (847) 673-2850  
 Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, [www.ilcap.com.hk](http://www.ilcap.com.hk)  
 © Copyright 2020 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved