



**332PPB102K**  
HIGH DVDT/ PULSE  
Parts are RoHS compliant

**APPLICATIONS:** SNUBBER, SCR commutation, TV deflection circuits

**ELECTRICAL SPECIFICATIONS**

**Capacitance:** 0.0033 uF

**Dissipation Factor:** 0.0005 Max at 1000 Hz and 25°C , 0.0005 Max at 10 kHz and 25°C , 0.0016 Max at 100 kHz and 25°C

**Temperature Coefficient:** -200 PPM/°C: -100 PPM/°C, 100 PPM/°C

**Ripple Current:** at and

**ESR:** - at - and -

**Self Inductance:** 1 Nanohenries maximum per mm of pitch

**dvdt:** 5500 V/μs

**Tolerance:** -10 % , +10 %

**Temperature Range:** -55°C to +105°C

Above 85°C the rated (DC/AC) voltage must be derated at per 1.25%/2.25%/°C

**WVDC:** 1000 Volts DC

**SVDC:** N/A Volts DC

**VAC:** 600 Volts AC

**Terminal to Terminal Dielectric strength:** 1.6 times the rated DC voltage when applied between the terminals for 10 seconds

**Terminal to case Dielectric strength:** 13.6 VAC when applied between the terminals and case for 60 seconds

**Insulation Resistance (Terminal to Terminal):** 100000 MINIMUM after 100 Volts DC is applied for 60 seconds at 20°C

**Insulation resistance (Terminal to Case):** N/A Megohms MINIMUM after 0 Volts DC is applied for 0 seconds at 0

**Reliability:** 1 FIT

**Load Life:** 2000 hours at 85°C with 125% of rated voltage

**Capacitance Change:** ≤1% of initially measured value

**D.F. Change:** .001 of maximum specified value

**I.R. Change:** >50% of minimum specified value

**PHYSICAL DIMENSIONS**

**Length (L):** 18 mm, 0.45 mm


**Height (H):** 11 mm, +/- .45 mm

**Thickness (T):** 5 mm, +/-0.3 mm

**Lead Spacing (S):** 15 mm, +/-0.4 mm

**Lead Diameter (d):** 0.8 mm, +/-0.05 mm

**Lead Length (LL):** 5.0mm, +/- 1 mm

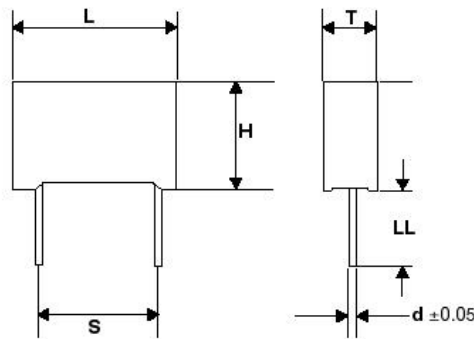

2400 East Devon Avenue Suite 292 Des Plaines, IL 60018 (847) 675-1760 FAX (847) 673-2850  
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, [www.illcap.com.hk](http://www.illcap.com.hk)  
© Copyright 2020 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved