



105CKE450M

RADIAL LEAD GENERAL PURPOSE

Parts are RoHS compliant

Date code when parts became RoHS: 23

APPLICATIONS: Filtering, Bypass, coupling

ELECTRICAL SPECIFICATIONS

Capacitance: 1 uF

Dissipation Factor: 0.2 Max at 120 Hz and 20°C

Temperature Range: -25°C to +105°C

Impedance: N/A

Tolerance: -20 %, +20 %

WVDC: 450 Volts DC

SVDC: 500 Volts DC

Ripple Current: 22 mA at 120 Hz and 105°C

Impedance Ratios:-25°C/20°C 7 and -40°C/20°C --

Leakage Current: .03CV+40uA

53.5 uA after 2 Minutes

Load Life: 2000 hours at 105°C with 100 % of rated voltage and with 0 % of rated ripple current

Capacitance Change: ≤20% of initial measured value

Dissipation Factor: ≤200% of maximum specified value

Leakage Current: ≤100% of maximum specified value

Frequency Multipliers:

| 50 HZ | 120 HZ | 400 HZ | 1 KHZ | 10 KHZ | 100 KHZ |
|-------|--------|--------|-------|--------|---------|
| 0.65 | 1 | 1.35 | 1.75 | 2.3 | 2.5 |

Temperature Multipliers:

| 45°C | 60°C | 70°C | 65°C | 75°C | 85°C | 105°C | 125°C |
|------|------|------|------|------|------|-------|-------|
| 2.23 | 2.17 | 1.9 | 2 | 1.75 | 1.75 | 1 | 0 |

PHYSICAL DIMENSIONS

Diameter (D): 10 mm + 0.5 mm

Length (L): 12.5 mm + 1.5 mm


Lead Spacing (S): 5 mm +/- 0.5 mm

Coating: CKH-BLK, CKE-BWNPET sleeving

Lead Wire Diameter (d): 0.6 mm +/- 0.05 mm

Lead Length: 15 mm +/- MIN mm

Lead Finish: Matte Tin

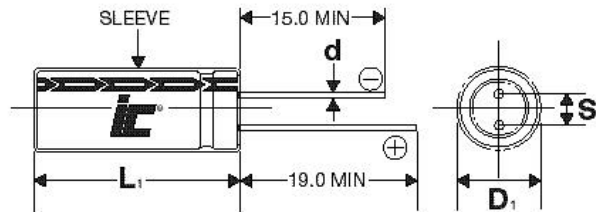

2400 East Devon Avenue Suite 292 Des Plaines, IL 60018 (847) 675-1760 FAX (847) 673-2850

Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk

© Copyright 2020 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved