



## 474PBM050M

RADIAL LEAD BI-POLAR/ NON-POLAR

Parts are RoHS compliant

Date code when parts became RoHS: 23

**APPLICATIONS:** audio coupling, speaker crossover circuits

### ELECTRICAL SPECIFICATIONS

**Capacitance:** 0.47 uF

**Dissipation Factor:** 0.14 Max at 120 Hz and 20°C

**Temperature Range:** -40°C to +85°C

**Impedance:** N/A

**Tolerance:** -20 %, +20 %

**WVDC:** 50 Volts DC

**SVDC:** 63 Volts DC

**Ripple Current:** 4 mA at 120 Hz and 85°C

**Impedance Ratios:** -25°C/20°C 2 and -40°C/20°C - 3

**Leakage Current:** .05CV or 10uA, whichever is greater  
10 uA after 2 Minutes

**Load Life:** 1000 hours at 85°C with 100 % of rated voltage and with 0 % of rated ripple current

**Capacitance Change:** ≤20% of initial measured value

**Dissipation Factor:** ≤200% of maximum specified value

**Leakage Current:** ≤100% of maximum specified value

#### Frequency Multipliers:

| 50 HZ | 120 HZ | 400 HZ | 1 KHZ | 10 KHZ | 100 KHZ |
|-------|--------|--------|-------|--------|---------|
| 0.75  | 1      | 1      | 1.45  | 1.7    | 1.7     |

#### Temperature Multipliers:

| 45°C | 60°C | 70°C | 65°C | 75°C | 85°C | 105°C | 125°C |
|------|------|------|------|------|------|-------|-------|
| 1.8  | 1.5  | 1.3  | 1.4  | 1    | 1    | 0     | 0     |

### PHYSICAL DIMENSIONS

**Diameter (D):** 4 mm + 0.5 mm

**Length (L):** 7 mm + 1 mm


**Lead Spacing (S):** 1.5 mm +/- 0.5 mm

**Coating:** BlackPET sleeving

**Lead Wire Diameter (d):** 0.45 mm +/- 0.05 mm

**Lead Length:** 15 mm +/- MIN mm

**Lead Finish:** Matte Tin

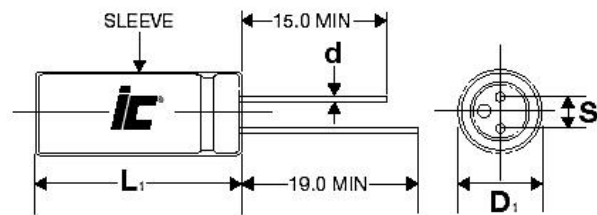

2400 East Devon Avenue Suite 292 Des Plaines, IL 60018 (847) 675-1760 FAX (847) 673-2850

Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, [www.illcap.com.hk](http://www.illcap.com.hk)

© Copyright 2020 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved