




RADIAL LEAD CUT & FORM SPECIFICATION

Special Order Options

Formed Leads Not Cut

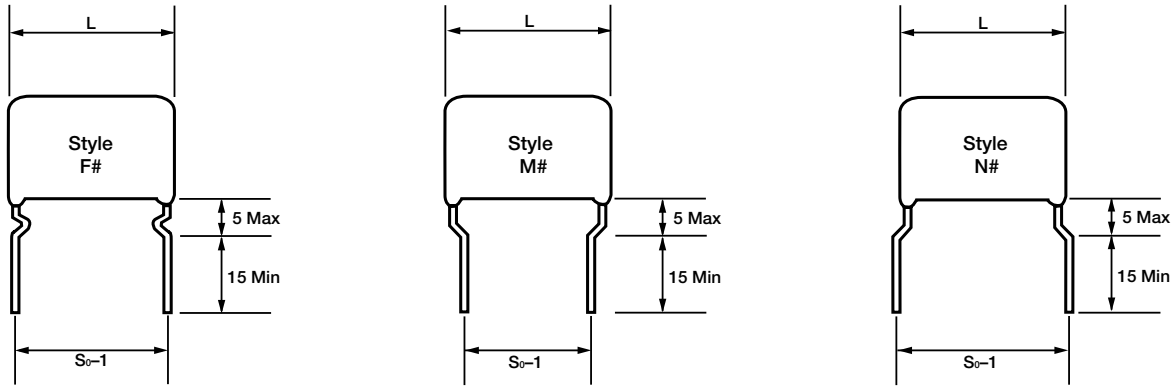


CODES FOR FORMED LEAD SPACING (S₀)

Initial Lead Spacing (S)	Formed lead spacing (S ₀) available	Initial Lead Spacing (S)	Formed lead spacing (S ₀) available
7.5	4, 5, 6, 7.5, 10, 12.5	27.5	17.5, 20, 22.5, 25, 27.5, 30, 32.5
10	4, 5, 6, 7, 7.5, 10, 12.5, 15	32.5	22.5, 25, 27.5, 30, 32.5, 37.5
15	5, 6, 7, 7.5, 10, 12.5, 15, 17.5, 20	37.5	27.5, 30, 32.5, 37.5, 42.5
20	10, 12.5, 15, 17.5, 20, 22.5, 25	42.5	32.5, 37.5, 42.5
22.5	12.5, 15, 17.5, 20, 22.5, 25, 27		

Formed lead spacing (S ₀)	Lead Forming Code	Formed lead spacing (S ₀)	Lead Forming Code	Formed lead spacing (S ₀)	Lead Forming Code
4.0	29	12.5	04	27.5	11
5.0	01	15.0	05	30.0	12
6.0	26	17.5	06	32.5	13
7.0	27	20.0	07	37.5	15
7.5	02	22.5	08	42.5	21
10.0	03	25.0	09		

Unit: mm

Cut & Formed Leads

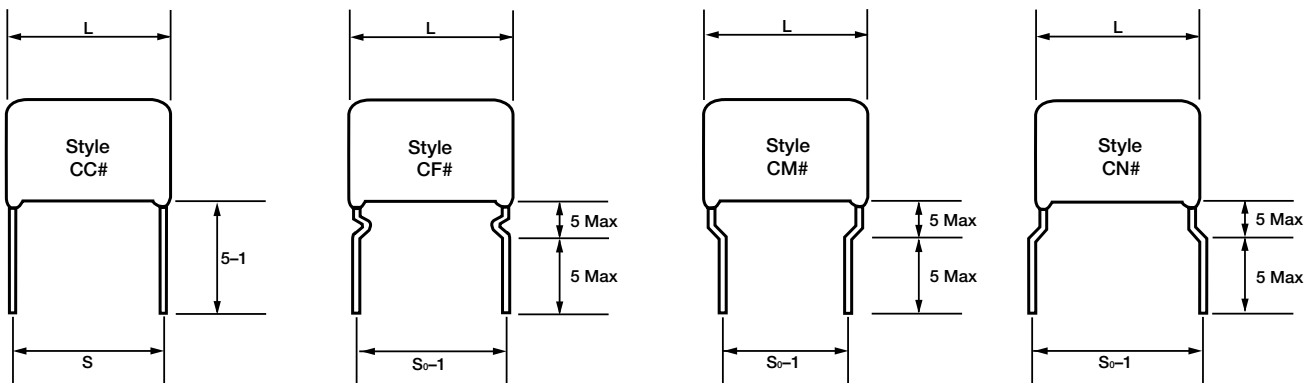

Example 104MSR400K with cut leads and lead spacing (S₀) to 10 mm
Part number would be 104MSR400KCM03

