



105CKE450M

RADIAL LEAD GENERAL PURPOSE

Parts are RoHS compliant

Date code when parts became RoHS: 23

APPLICATIONS: Filtering, Bypass, coupling

ELECTRICAL SPECIFICATIONS

Capacitance: 1 uF

Dissipation Factor: 0.2 Max at 120 Hz and 20°C

Temperature Range: -25°C to +105°C

Impedance: N/A

Tolerance: -20 %, +20 %

WVDC: 450 Volts DC

SVDC: 500 Volts DC

Ripple Current: 22 mA at 120 Hz and 105°C

Impedance Ratios:-25°C/20°C 7 and -40°C/20°C --

Leakage Current: .03CV+40uA

53.5 uA after 2 Minutes

Load Life: 2000 hours at 105°C with 100 % of rated voltage and with 0 % of rated ripple current

Capacitance Change: ≤20% of initial measured value

Dissipation Factor: ≤200% of maximum specified value

Leakage Current: ≤100% of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.65	1	1.35	1.75	2.3	2.5

Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2.23	2.17	1.9	2	1.75	1.75	1	0

PHYSICAL DIMENSIONS

Diameter (D): 10 mm + 0.5 mm

Length (L): 12.5 mm + 1.5 mm


Lead Spacing (S): 5 mm +/- 0.5 mm

Coating: CKH-BLK, CKE-BWNPET sleeving

Lead Wire Diameter (d): 0.6 mm +/- 0.05 mm

Lead Length: 15 mm +/- MIN mm

Lead Finish: Matte Tin

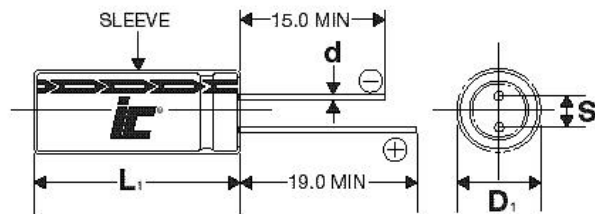

2400 East Devon Avenue Suite 292 Des Plaines, IL 60018 (847) 675-1760 FAX (847) 673-2850

Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk

© Copyright 2020 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved